


SURE-GRIP™ TOOL MOUNTS


MODEL: SG-VM-275 AND SG-VM-275-Y

PARTS AND INSTRUCTION MANUAL


- 2 3/4" Stand off from mounting surface to bottom of the tool cradle.
- 3/4" to 2" Grip Range
- Molded-in support arm provides assistance and stability while securing tool
- High-tensile strength plastic base
- 1" wide heavy-duty, all-weather hook & loop straps that have secured your tools and equipment for over 20 years.
- Strap conforms to the handle, no matter the shape, providing a tighter, more “true” grip on every tool.
- Dual rubber pads combine for a premium grip

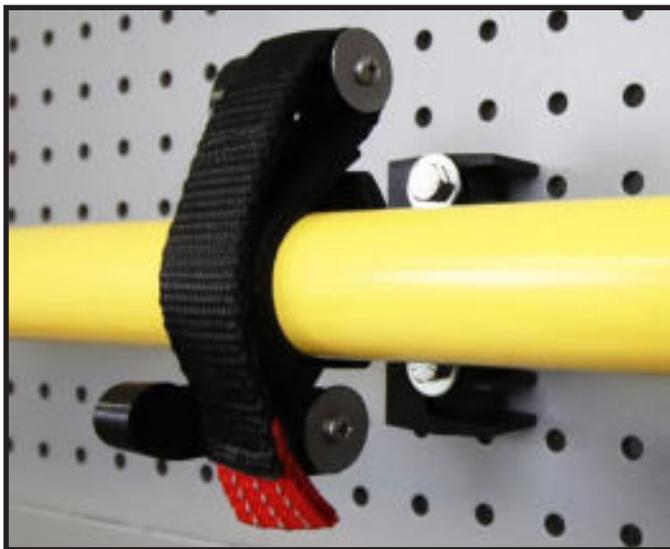

Scan this code to visit our website for more information


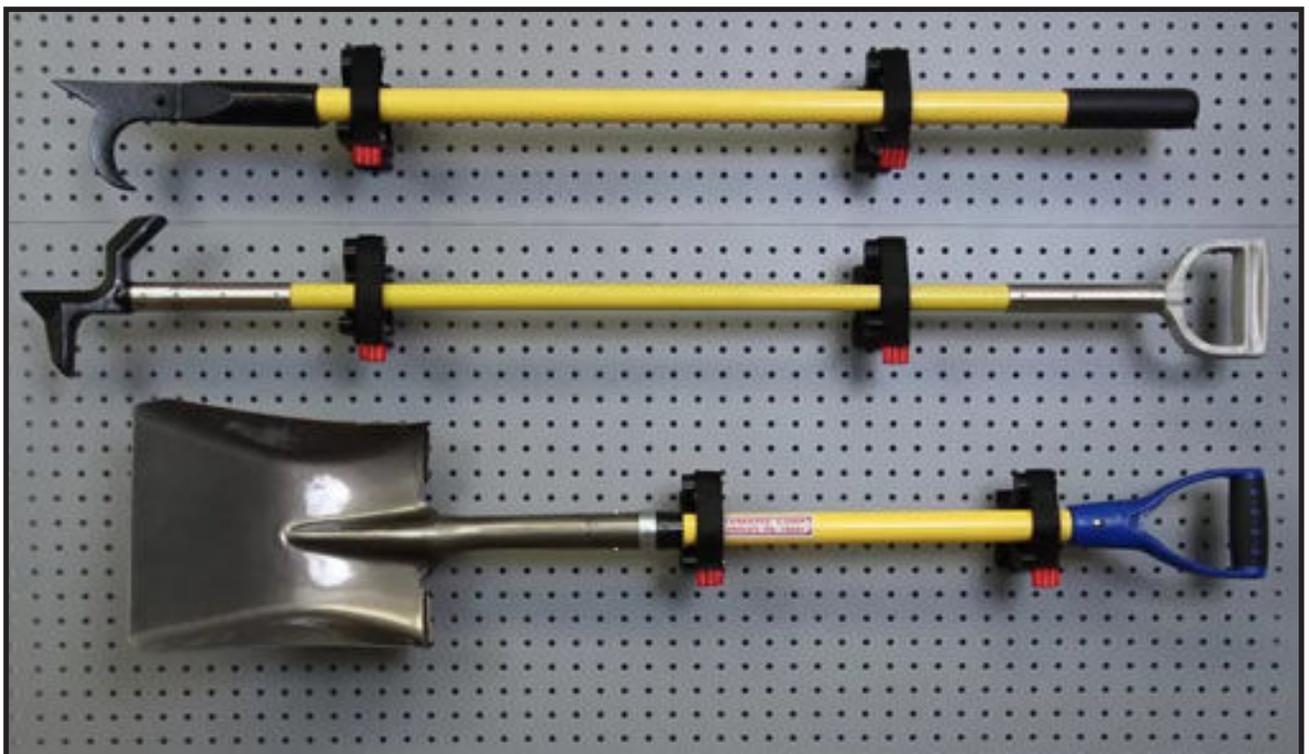


Parts Diagram/Breakdown

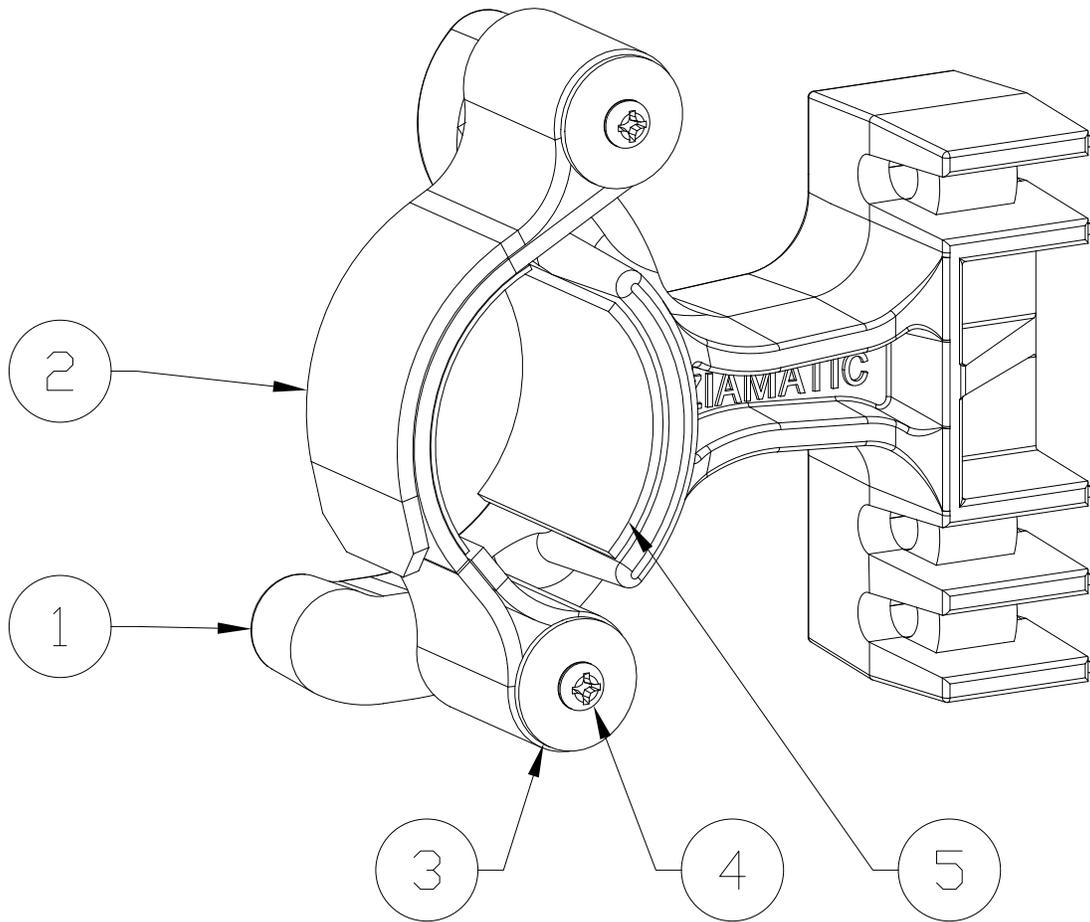

Item #	Part #	Description	Qty
1	3085-650-101	BASE, SURE GRIP 2 3/4"	1
2	3085-650-103 3085-655-103	STRAP, BLACK STRAP, YELLOW	1
3	9114-161312	FENDER WASHER, #6 X 3/4" O.D. S/S	2
4	9125-191306	SCREW, #6 x 3/8" THREAD CUTTING, PHIL PAN HD, SS	2
5	3085-650-105	RUBBER PAD WITH ADHESIVE	1

Dimensions

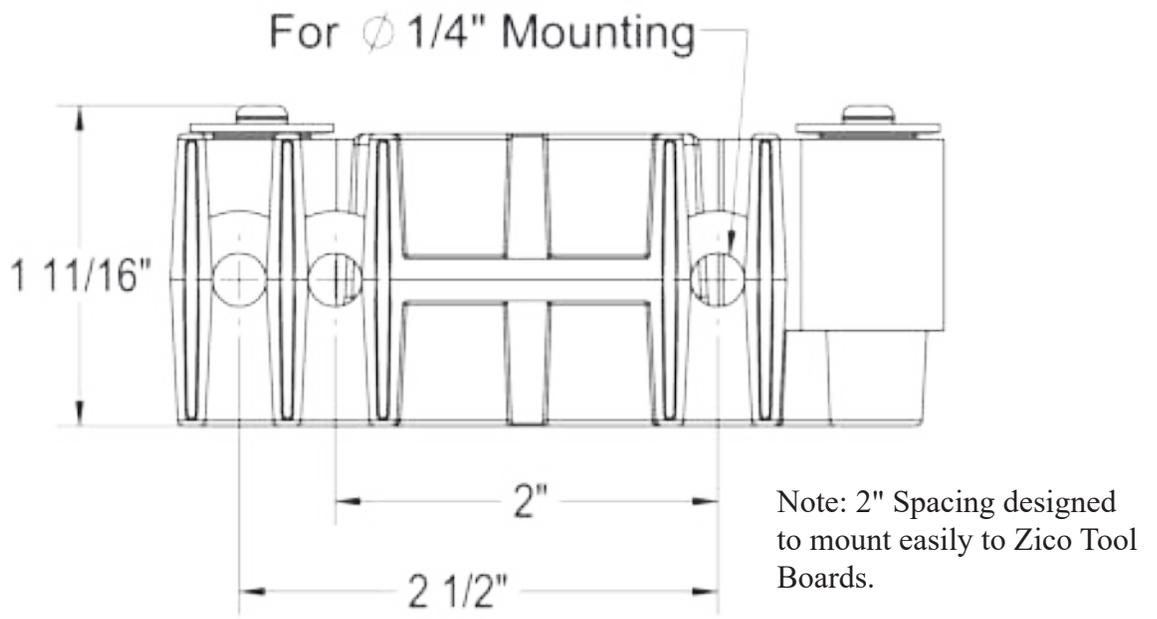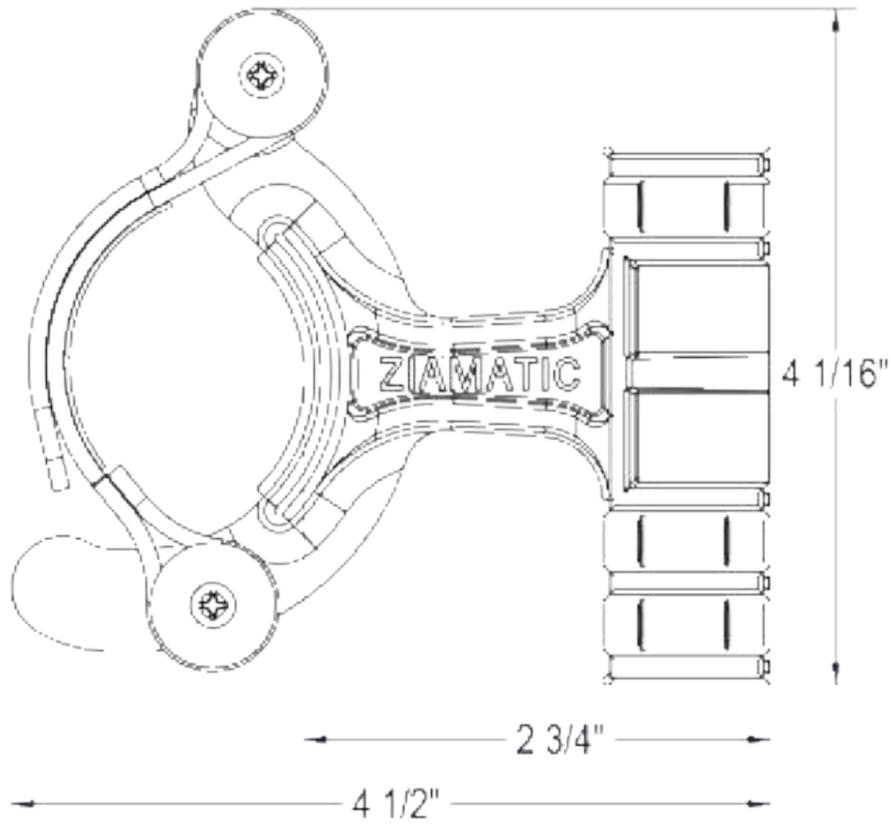

Mounting

Note: Mounting hardware not provided

1. When installing tools horizontally, position the sure grip so the post holding the strap is on the bottom. The flat area is where the tools can rest. The strap should be hanging down out of the way of the tool storage area (see cover).
2. If mounting vertically, sure grips can be placed in either orientation.
3. Place two sure grips in line so that each end of the tool is supported (see cover).
4. Use two 1/4" bolts, nuts, and washers to mount Sure-Grips in the desired location.
When mounting to Zico Aluminum Tool Boards use the 2" spaced mounting holes, we advise using Truss Head bolts.(See page 3)

Using

Securing the Tool (Shown below)

Note: Item numbers in parentheses (see Page 2)

1. Place the tool so it is resting on the Sure-Grip base(1).
2. Wrap the strap(2) over the tool and loop it around the opposite post.
3. Pull the strap(2) away from the base(1) and over the tool to engage the hook and loop pads, press together to secure.

Removing the Tool

1. Grab the end of the strap(2) at the red tab and pull the hook and loop apart to release the connection.
2. Pull the tool away from the base(1), through the loosened strap.
3. Strap will free itself as you pull.



Ziamatic Corp.

10 West College Avenue, P.O. Box 337, Yardley, PA 19067-0587 • (215) 493-3618 • FAX: (215) 493-1401

*ZICO is a registered trademark for fire, safety and marine products made by Ziamatic Corp.

www.ziamatic.com

TOLL FREE: 800-711-3473

Copyright Ziamatic Corp. 1-24