



# The JTC Claw Sling Kit, Assembly



- Sling Kit includes:
- One “Quick Release” Sling
- 2 – 4” adhesive backed Velcro “Loop Tape”
- 2 – 7” Double Sided Velcro straps




# The JTC Claw Sling Kit, Assembly



- Peel backing off of 4" Velcro "loop tape"
- Place it right below hand grip and make sure it adheres to surface
- Repeat the process placing the second 4" Velcro "loop tape" right above the head




# The JTC Claw Sling Kit, Assembly

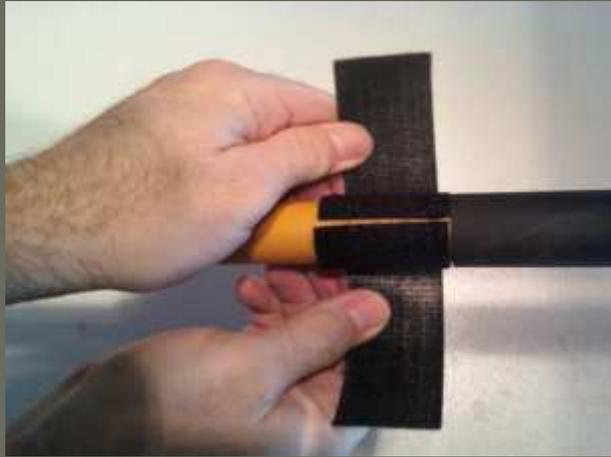

- Take 7" double sided Velcro and put hook side against the "loop tape" which was just applied.
- Tightly wrap double sided tape around the web portion of the sling.
- The double sided Velcro will overlap itself.
- The pad portion should be by the handle. Leave from 6" to 18" of extra webbing between the top of the double sided Velcro and the pad.
- This will ensure that the pad rests on the shoulder.
- This will vary depending on what gear you are wearing.
- Pull the web down towards the head and affix the same way with the double sided Velcro wrapping tightly around the sling.



# The JTC Claw Sling Kit, Assembly

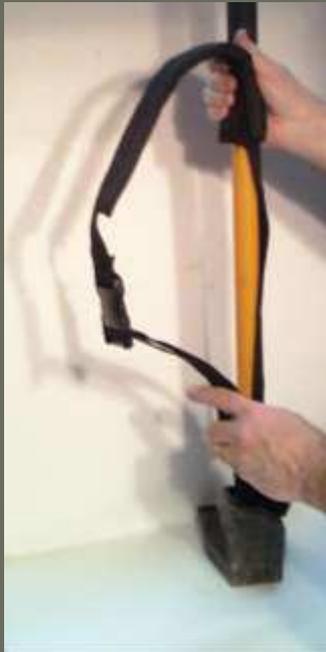

- Make sure the buckle is in the front for a “quick release”.
- Adjust for a safe and comfortable fit.
- It is the end user’s responsibility to ensure safe use of the JTC Claw Sling. The end user must evaluate potential injury to himself or others around when carrying a breaching tool in this manner. Injury can be sustained by getting hung up or trapped by tool or sling or from contact with the heavy sharp head.